

# LED RECESSED VARIANT II DYNAMIC

## Luminaire body

Manufactured in steel sheet stove-enamelled in white colour.

Installation: versatile recessed mounting<sup>(1)</sup> by spring clips that allow a precise adjustment of the luminaire for ceiling thicknesses ranging from 5 to 45 mm. These mounting spring clips are included in the standard delivery.

The electrical connection is made to a push wire terminal block.

□ **Ceiling cut:** 588x588 mm.

(1) The dimensions of the grid system should be taken into account for a correct integration.



Versatile recessed mounting

Mains voltage: 220-240 V / 50-60 Hz.


Corrected power factor  $\Phi$  0.95.

## Optics

New optical technology with highly transparent microprismatic structure formed by a matrix of microcones with hexagonal base for total glare control.

High lumen maintenance and glare limitation:  $L < 1,000 \text{ cd/m}^2$  at  $65^\circ$  from the vertical axis for UGR 19.

Light source: LED DYNAMIC with a high selection of binning (3 steps) with a colour temperature range from 2,700 to 6,500 K that guarantees the light output emitted and the mixture of colour temperatures to recreate daylight indoors.

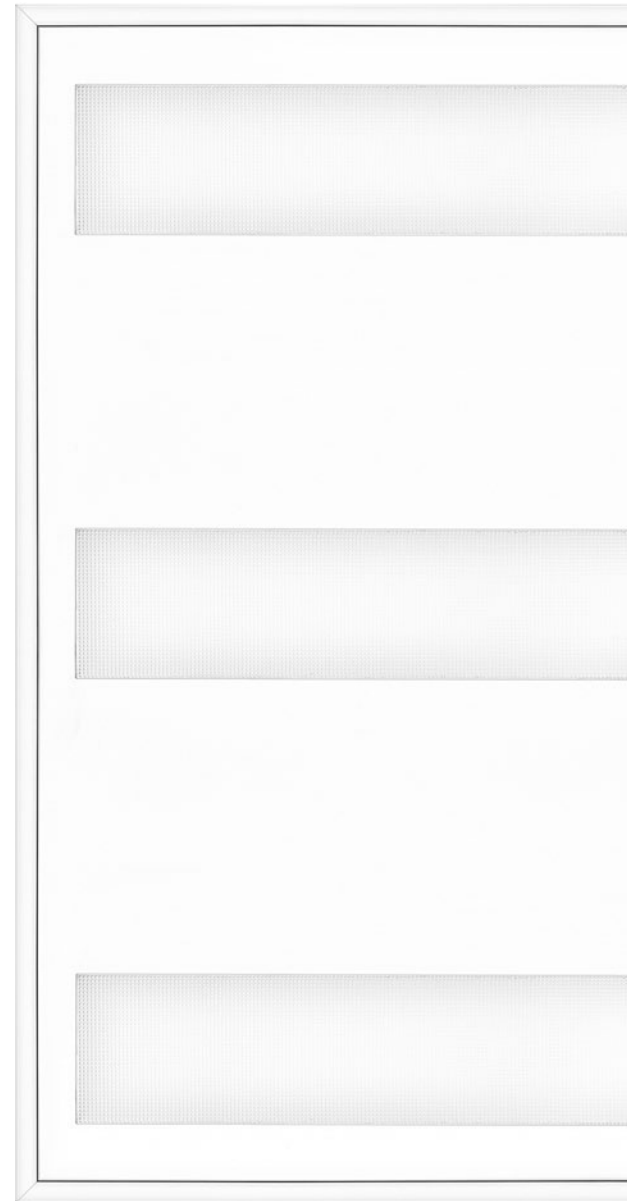


Detail

# ADJUSTABLE AND FUNCTIONAL LIGHT

ON REQUEST:  RAL colours




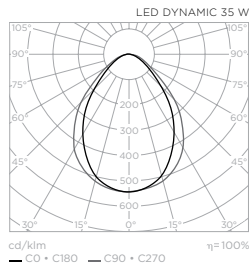

## Dimensions

Measures in mm

Versatile recessed  
mounting 3 apertures

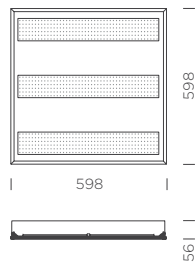

## Applications



Offices



Schools/Training centres



Shopping centres



Corridors

## Luminaires

Light source	W	Colour temperature	CRI	Light output	Kg	Ref. DALI dimmable
--------------	---	--------------------	-----	--------------	----	--------------------

**VARIANT II DYNAMIC • Recessed luminaire with variable colour temperature and high-performance optics versatile mounting. White colour**

**600x600 mm module**

LED DYNAMIC	35	2,700-6,500 K	80	3,855 lm	4.8	32533308DY200
-------------	----	---------------	----	----------	-----	---------------