

LED ARCHITECTURAL

OD-8200 LED IP65

Luminaire body

Made of die-cast aluminium stove-enamelled in RAL-9006 colour.

Electrical and control connections are made outside the luminaire by male-female connectors IP65 (not included in the standard supply). The luminaire has one-meter three-pole pre-installed wire (1.5 mm² section) to prevent opening on site and to ensure from factory its ingress protection rating. The power supply and control line on RGB versions have independent wiring.

The control addressing of the RGB DMX series is performed inside the luminaire before its installation.


Mains voltage: 220-240 V / 50-60 Hz.

Mounting by stainless steel holder that allows the spotlight orientation. This orientation can be set by a graduated scale.

Thanks to its ingress protection rating and technical qualities, the OD-8200 LED series is specially suitable for indoor and outdoor installations.



Due to its ingress protection rating and technical qualities, OD-8200 LED is particularly suitable for indoor and outdoor installations with extreme ambient temperatures.

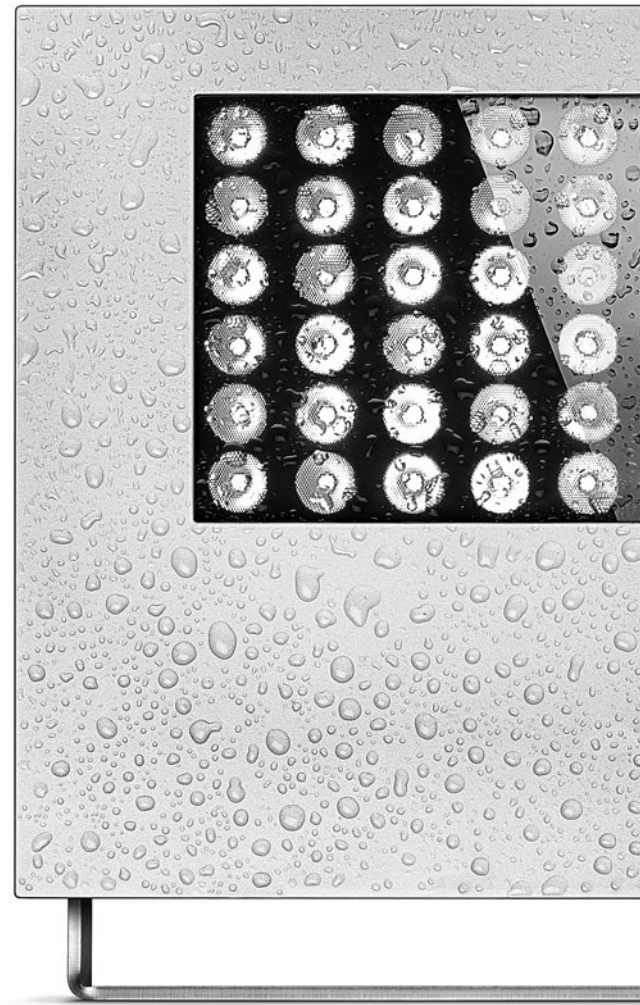

EASY-TO-FIT DESIGN

ON REQUEST:  RAL colours  3000K

ledogroup.com



LED ARCHITECTURAL • OD-8200 LED IP65

LLEDØ LIGHTING BOX / C10 • 2015 • 01



Luminaire body (continued)

RGB version is dimmable individually through red, green and blue channels (0-100%) by DMX signal, DMX512-A protocol of three channels.

Routing by DIP switch strip.


Optics

Optimised lens for each LED available with intensive beam 12° (Spot), to illuminate very high elements and elliptical beam 12°x46° (Oval) to illuminate facades or general lighting.

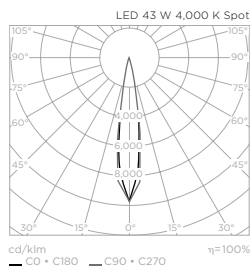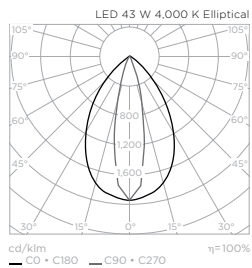

Dimensions

Measures in mm

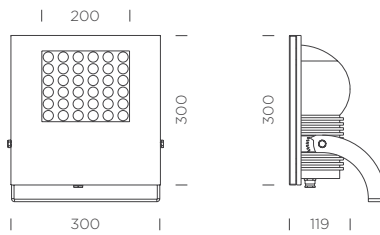

Applications



Landscape



Lighting of facades



Ornamental outdoor lighting



Industry



Airports

Luminaires

Light source	W	Colour temperature	Light output	Kg	Reference
OD-8200 LED IP65 • Spotlight IP65 with Spot light beam. RAL-9006 colour					
LED	43	4,000 K	3,700 lm	8.2	8252000002001
LED RGB	37	RGB	1,436 lm	8.2	8253000007001
OD-8200 LED IP65 • Spotlight IP65 with oval light beam. RAL-9006 colour					
LED	43	4,000 K	3,700 lm	8.2	8252000E02001
LED RGB	37	RGB	1,436 lm	8.2	8253000E07001